


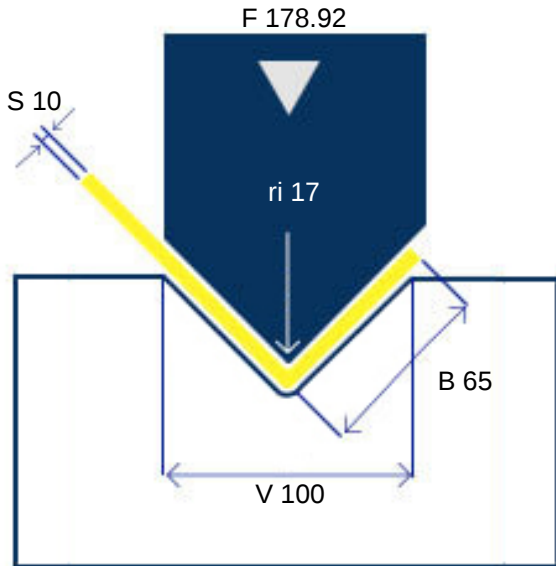

Safety Coefficiency

1.42

Sheet Thickness(s)

10 mm

Length (L)

3000 mm

Tensile Strength(Ots)

42 kg/mm²

V Channel Openning(V)

100 mm

Bending Force (F)

178.92 ton

Radius (inner) (Ri)

17 mm

Bending Force(F/m)

178.92 ton/m

B Flange (B)

65 mm